





fiorentini

we clean the world

S150



caratteristiche tecniche	technical specification	caractéristiques techniques		S150
larghezza utile lavoro (2sp)	scrubbing width (2br)	largeur de nettoyage (2br)	mm	1250
larghezza utile lavoro (3sp)	scrubbing width (3br)	largeur de nettoyage (3br)	mm	2000
rendimento orario max(2sp)	cleaning capacity up to (2br)	rendement jusqu'à (2br)	mq/h	15000
rendimento orario max(3sp)	cleaning capacity up to (3br)	rendement jusqu'à (3br)	mq/h	24000
capacità contenitore rifiuti	waste tank capacity	capacité bac de vidange	L	1 m³
altezza scarico	dumping height	hauteur de décharge	mm	1520
Velocità di lavoro	working speed	vitesse de travail	km/h	12
Velocità di trasferimento	forward speed	vitesse d'avancement	km/h	30
max pendenza	max. slope	pente max. surmontable	%	25
raggio sterzata (2sp)	turning radius (2br)	rayon de virage (2br)	mm	8330
raggio sterzata (3sp)	turning radius (3br)	rayon de virage (3br)	mm	8840
Serbatoio gasolio	fuel gas oil tank capacity	capacité réservoir diesel	L	46
Consumo	consumption	consommation		0,7L
Capacità serbatoio d'acqua	water tank capacity	Capacité réservoir de eau	L	270L
autonomia	operating range	autonomie	h	5,5 h
alimentazione	voltage	alimentation		S150
motore aspirazione	vacuum motor	moteur d'aspiration		Idraulico / hydraulic / hydraulique
Marca motore	brand motor	moteur marque		KUBOTA V 150T
motore spazzola centrale/laterale	central/ side brush motor	moteur de la brosse centrale/ latérale		Idraulico / hydraulic / hydraulique
tenzione alimentazione	feeding	alimentation		12v
alimentazione	feeding	alimentation		diesel
potenza cilindri	power cylinders	puissance cylindres		44,2 hp/4
raffreddamento	cooling	refroidissement		Acqua/water/eau
dimensioni	dimensions	dimensions		S150
dimensioni	dimensions	dimensions	mm	3400x1250x1980
Spazzola laterale (2 spazz.)	slide brush (2 brusses)	Brosse laterale (2 brosses)	mm	Ø700
Spazzola laterale (3 spazz.)	slide brush (3 brusses)	Brosse laterale (3 brosses)	mm	Ø800
peso macchina	weight of the machine	poids de la machine-	kg	2400

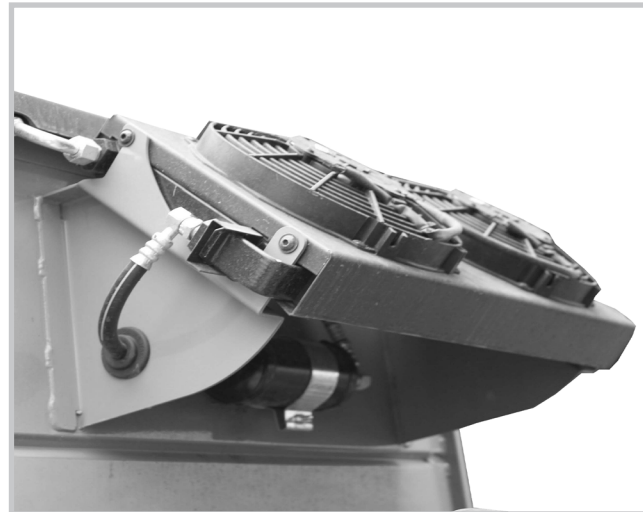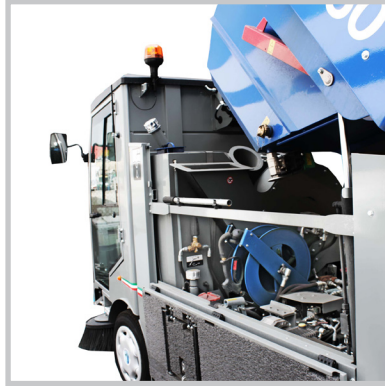



fiorentini

w e c l e a n t h e w o r l d

stabilimenti produttivi

50033 Piancaldoli (FI) via Piancaldoli 1896 Firenzuola
tel +39 0558173610 - fax +39 055817144

50033 Pietramala (FI) via pietramala 70/B
tel +39 055813447 - fax +39 055813504

40024 Castel San Pietro (BO) via Cà Bianca 231/C
tel +39 051941743 - fax +39 0516942400

filiali commerciali

20132 Milano via Palmanova 211/A
tel +39 0227207783 - fax +39 022592779

00012 Guidonia Montecelio (Roma) via Bruno Pontecorvo 20
tel +39 0774357184 - fax +39 0774353419

dati aziendali

ing. O. Fiorentini s.p.a. via Piancaldoli, 1896 - Firenzuola

50033 Fraz. Piancaldoli (FI) - Italia

P.I. 06113160482

Certificazione ISO 9001:2015

e-Mail: info@ingfiorentini.it